


| NO | DESCRIPTION OF REVISIONS | MADE BY | DATE |
|-------|------------------------------|----------|------|
| Ξ | RE-DESIGN, DIMENSION CHANGES | L. LOPEZ | 5/03 |
| (2) | | | |
| (3) | | | |
| 4 | | | |

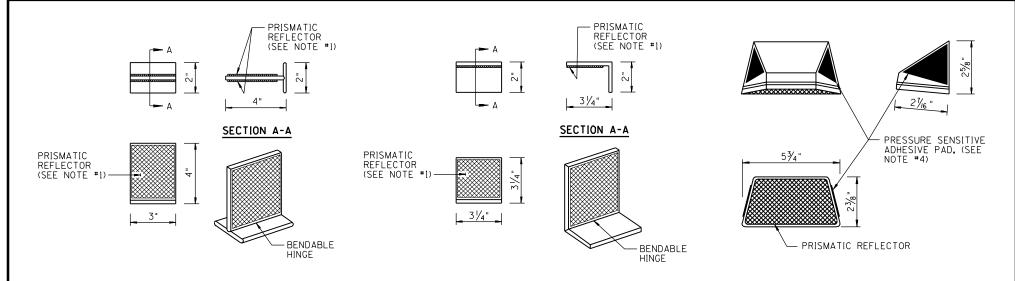

CONCRETE BARRIER MARKERS



SECTION B-B



TUBULAR THRIE BEAM BARRIER MARKERS

1. BRIDGE AND BARRIER MARKER DESIGNATIONS SHALL BE AS FOLLOWS:

BM-1 SINGLE FACE WHITE BM-2 SINGLE FACE YELLOW BM-3 TWO SIDED YELLOW

- 2. BRIDGE AND BARRIER MARKERS SHALL CONFORM TO SECTION 905 OF THE STANDARD SPECIFICATIONS.
- 3. PRISMATIC REFLECTORS SHALL BE WHITE OR YELLOW AS REQUIRED AND SHALL CONFORM TO THE REQUIRMENTS OF SECTION 1008 OF THE STANDARD SPECIFICATIONS.
- 4. CONCRETE BARRIER MARKER SHALL BE INSTALLED USING MANUFACTURER APPROVED ADHESIVE APPLIED WITH A CAULKING GUN.
- 5. ALL DIMENSIONS ARE APPROXIMATE.



NOT TO SCALE

NOTES: